

2200-2500MHz/200Watt/Module

Model Number: MCW2400M53A

The model MCW2400M53A is a narrowband high power amplifier operating between 2200MHz and 2500MHz and offering a wide dynamic Range with 200Watts typical saturated power. The employment of (LDMOS) and chip-and-wire technology in manufacturing ensures this module state-of-the-art power performance with excellent power-to-volume ratio. It is ideal for jamming, EMC, test and measurement applications.

FEATURES:

- Small Size and light weight
- 50 Ohms input and Output matched
- Built-in control and protection circuits

ELECTRICAL SPECIFICATIONS @ +28.0VDC, 25°C, 50Ω

Parameter	Symbol	Minimum	Typical	Maximum	Units
Operating Frequency	BW	2200		2500	MHz
RF Output Power @ Pin=25dBm	Psat	150	200		Watt
Power Gain	Gp		28		dB
Power Gain Flatness	Δ Gp		±2		dB
Input Return Loss	S ₁₁			-10	dB
Harmonics @150W	H		-15		dBc
Spurious Signals	Spur		-55		dBc
In/Output Impedance			50		Ω
Operating Voltage	V _{DC}	24	28	32	Volt
DC Current @200W	I _{DD}		24		Amp
Switching Time @1kHz TTL	T _{on/off}		2	5	uSec

MECHANICAL SPECIFICATIONS

Parameter	Value	Units	Limits
Dimensions	200x150x30 [7.87x5.91x1.18]	mm [inch]	Maximum
Weight	2 [4.4]	kg [lbs]	Maximum
RF Connectors Input	SMA, Female		
RF Connectors Output	Type-N, Female		
DC Interface Connector	Hybrid,D-sub 7 Pin, Male		
Cooling	External Heatsink (Not Supplied)		

ENVIRONMENTAL CHARACTERISTICS (Design to Meet)

Parameter	Minimum	Typical	Maximum	Units	Notes
Operating Temperature	-20		60	°C	
Non-operating Temperature	-25		65	°C	Storage
Relative Humidity (non-condensing)			95	%	

Absolute Maximum Rating

Input RF drive level without	+30 dBm (Max)
Load VSWR @ POUT =100W	∞ @ all load phase & amplitude for duration of 1 minute; 3:1 @ all load phase & amplitude continuous
Thermal Overload	85°C @ heatsink [restored @ 60°C]


2200-2500MHz/200Watt/Module

Model Number: MCW2400M53A

DC INTERFACE CONNECTOR

Pin #	Description	Specifications
A1	VDD	28VCC
A2	GND	Ground
1	SHUTDOWN	Amplifier Disable: TTL Logic High (3.3V) (Internally Pulled-Low)
2	CURRENT MONITOR	Analog voltage relative to I _{DD} @ 100mV per Ampere
3	TEMP MONITOR	Analog voltage relative to Module's Temperature @ 10 mV/°C
4	GND	Ground
5	NC	No electrical connection

OUTLINE DRAWING (All dimensions in mm [inch])

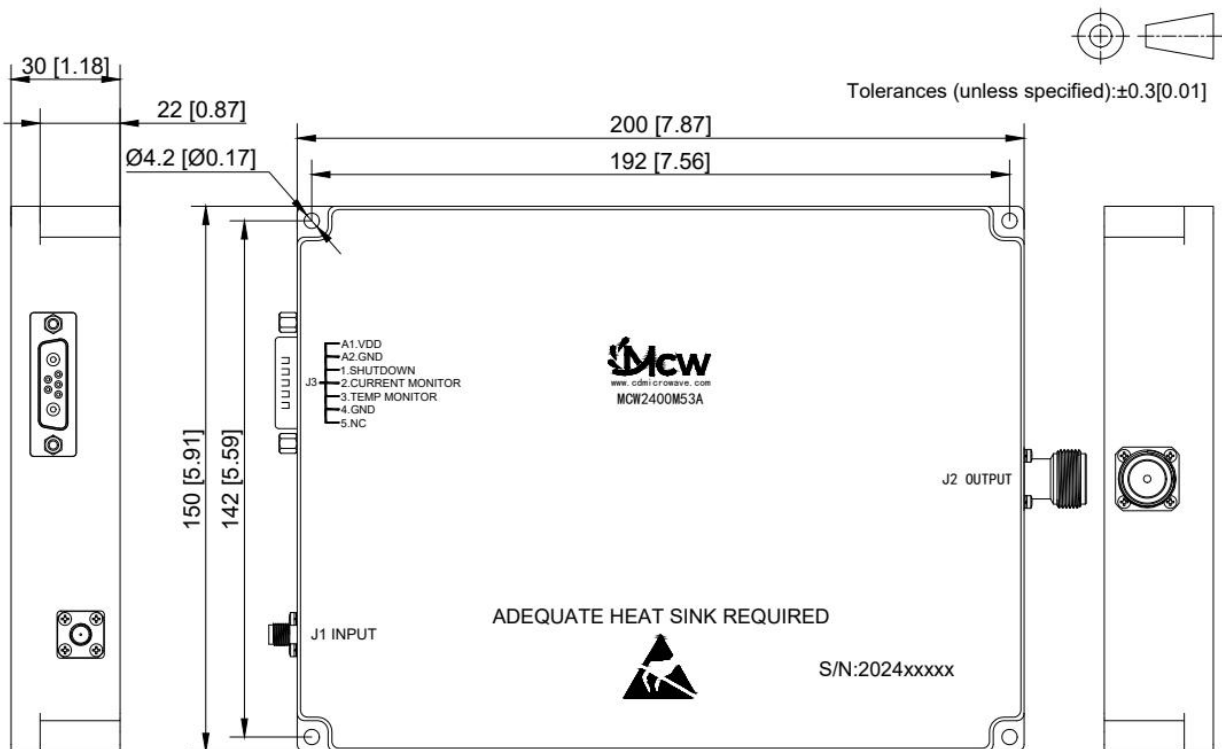

Chengdu Microwave Technology Co., Ltd

>>1st Floor, Building 3#, Huidu Science Park, No.5 Xixin Avenue, High-tech West District, Chengdu, China 611731

>>Tel:+86(28)87872669*0

>>Fax:+86(28)87882925

>>Mobile/WhatsApp:+86-181 8078 9271

>>E-mail: info@cdmicrowave.com


>>www.cdmicrowave.com

2200-2500MHz/200Watt/Module

Model Number: MCW2400M53A

TYPICAL PERFORMANCE PLOTS (for reference)

Graph1: Output Power(Normal temp.+25±3℃)

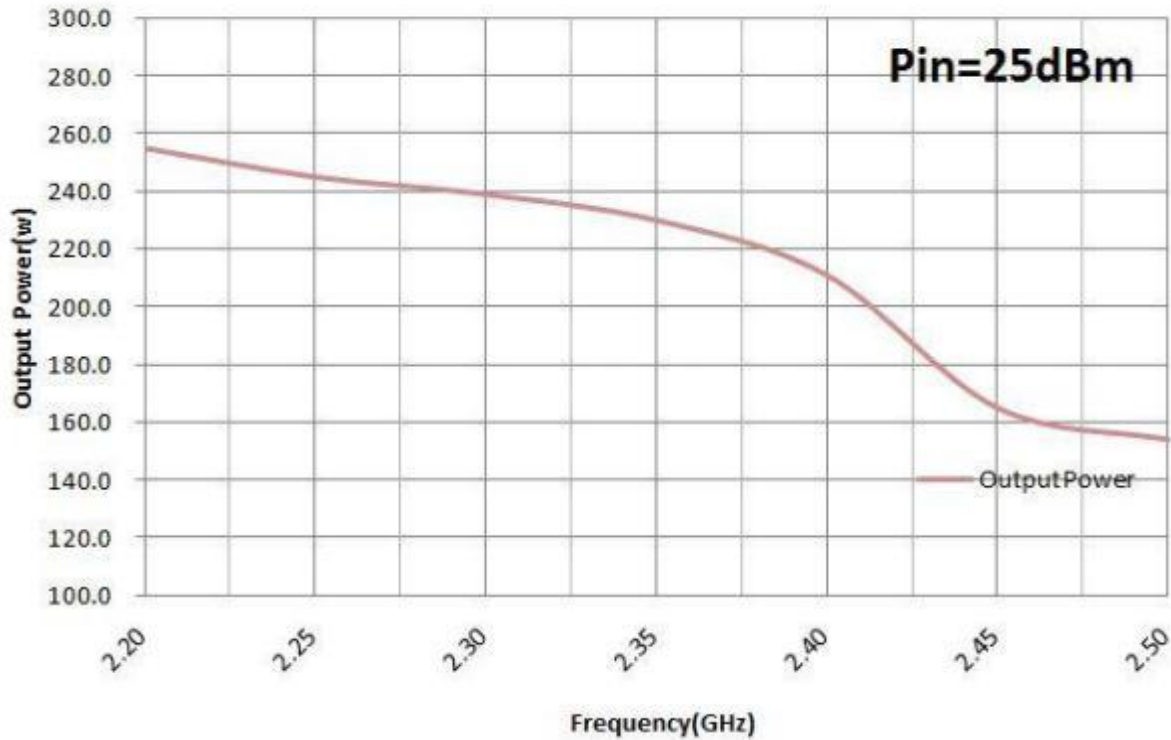

Important Note:

1. Adequate heatsink required.
2. This product will be developed upon contract/order. All the above specs are for reference only. Actual product may be different. Please check with [Chengdu Microwave Technology Co., Ltd](mailto:info@cdmicrowave.com) sales team or E-mail to info@cdmicrowave.com if you have any more questions.

Chengdu Microwave Technology Co., Ltd

>>1st Floor, Building 3#, Huidu Science Park, No.5 Xixin Avenue, High-tech West District, Chengdu, China 611731

>>Tel: +86(28)87872669*0

>>Fax: +86(28)87882925

>>Mobile/WhatsApp: +86-181 8078 9271

>>E-mail: info@cdmicrowave.com

>>www.cdmicrowave.com